

**Features**

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Output 45 mA at 11.7 V DC
- Logic input, non-polarized
- Up to SIL 2 acc. to IEC 61508


**Function**

This isolated barrier is used for intrinsic safety applications. It supplies power to solenoids, LEDs, and audible alarms.


It is controlled by means of a logic circuit. Voltage signals in a range of 16 V DC ... 30 V DC are accepted as 1-signal. The 0-signal must be within a range of 0 V DC ... 5 V DC. The current consumption of the logic inputs is about 3 mA each.

At full load, 11.7 V at 45 mA is available for the hazardous area load.

**Assembly**

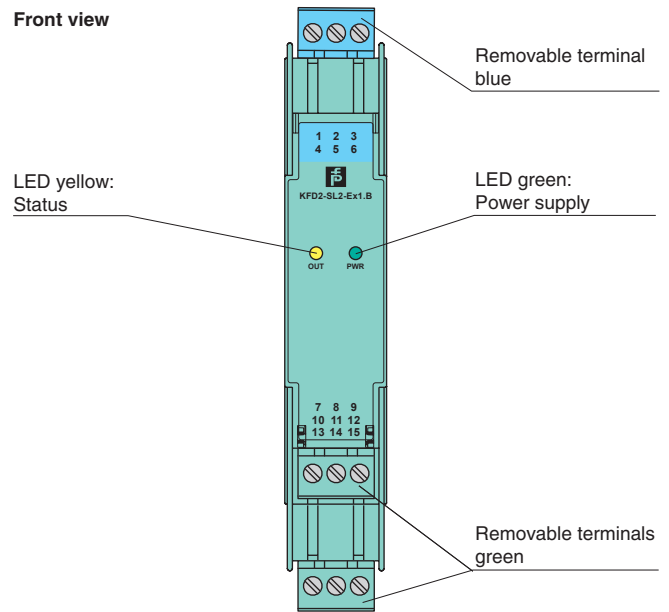

**Connection**

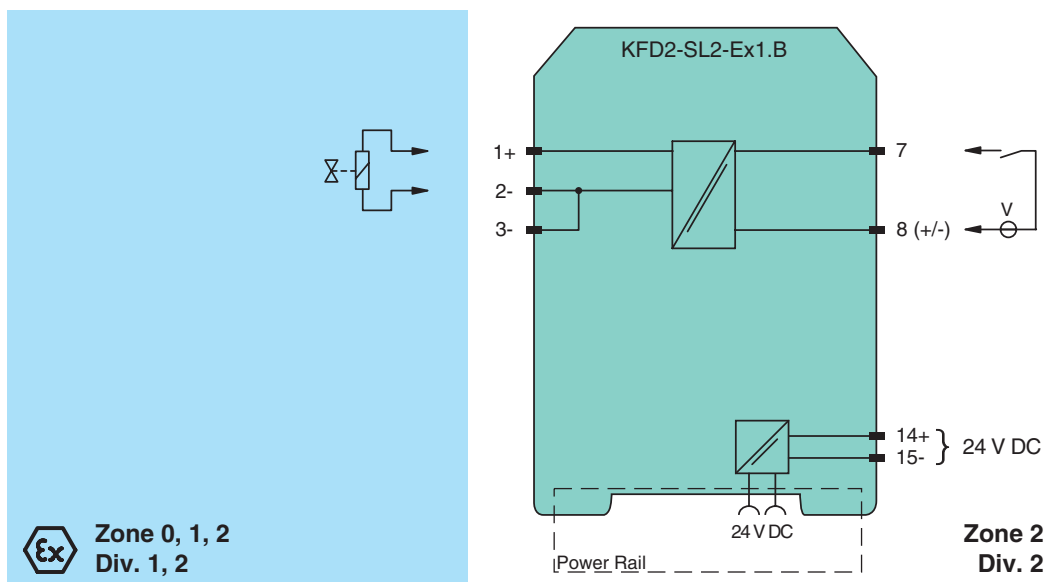

Release date 2017-08-09 14:45 Date of issue 2017-08-10 184257\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>General specifications</b>		
Signal type		Digital Output
<b>Functional safety related parameters</b>		
Safety Integrity Level (SIL)		SIL 2
<b>Supply</b>		
Connection		Power Rail or terminals 14+, 15-
Rated voltage	$U_r$	20 ... 30 V DC
Power consumption		≤ 1.7 W at 45 mA output current
<b>Input</b>		
Connection side		control side
Connection		terminals 7, 8
Input current		approx. 3 mA at 24 V DC
Signal level		1-signal: 16 ... 30 V DC 0-signal: 0 ... 5 V DC
<b>Output</b>		
Connection side		field side
Internal resistor	$R_i$	272 Ω
Current	$I_e$	≤ 45 mA
Voltage	$U_e$	≥ 11.7 V
Open loop voltage	$U_s$	≥ 24 V
Connection		terminals 1+, 2- or 3-
Output rated operating current		45 mA
Output signal		These values are valid for the rated operating voltages from 20 ... 30 V DC.
Energized/De-energized delay		≤ 20 ms / ≤ 20 ms
<b>Galvanic isolation</b>		
Input/Output		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Input/power supply		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Power supply/Output		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>		
Display elements		LEDs
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2006
Degree of protection		IEC 60529:2001
Protection against electrical shock		EN 61010-1:2010
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 150 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate		ZELM 00 ATEX 0024
Marking		⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1)D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Output		Ex ia
Voltage	$U_o$	28 V
Current	$I_o$	110 mA
Power	$P_o$	770 mW (linear characteristic)
<b>Supply</b>		
Maximum safe voltage	$U_m$	40 V (Attention! The rated voltage can be lower.)
<b>Input</b>		
Maximum safe voltage	$U_m$	60 V (Attention! The rated voltage can be lower.)
<b>Collective error message</b>		
Maximum safe voltage	$U_m$	40 V (Attention! The rated voltage can be lower.)
<b>Certificate</b>		
Marking		TÜV 02 ATEX 1820 X ⊕ II 3G Ex nA IIC T4 Gc
<b>Galvanic isolation</b>		


Release date 2017-08-09 14:45 Date of issue 2017-08-10 184257\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".


Input/Output	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Output/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010 , EN 60079-26:2007 , EN 50303:2000
<b>International approvals</b>	
CSA approval	
Control drawing	116-0304
IECEX approval	IECEX TUN 04.0001
Approved for	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Output characteristic**

**Output circuit diagramm**



**Output characteristic for input voltage 20 V ... 30 V**  
E: Curve angle point ( $U_E$ ,  $I_E$ )

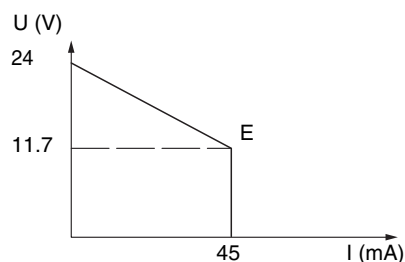

**Accessories**

**Power feed module KFD2-EB2**

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. Collective error messages received from the Power Rail activate a galvanically-isolated mechanical contact.

**Power Rail UPR-03**

The Power Rail UPR-03 is a complete unit consisting of the electrical insert and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

**Profile Rail K-DUCT with Power Rail**

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



*Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!*

Release date 2017-08-09 14:45 Date of issue 2017-08-10 184257\_eng.xml