

**Features**

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current output up to 650 Ω load
- HART I/P and valve positioner
- Lead breakage monitoring
- Accuracy 0.1 %
- Housing width 12.5 mm
- Up to SIL 2 acc. to IEC 61508

**Function**

This isolated barrier is used for intrinsic safety applications. It drives SMART I/P converters, electrical valves, and positioners in hazardous areas.

Digital signals are superimposed on the analog values at the field or control side and are transferred bi-directionally.


Current transferred across the DC/DC converter is repeated at terminals 1 and 2.

An open field circuit presents a high input impedance to the control side to allow lead breakage monitoring by control system.

If the loop resistance for the digital communication is too low, an internal resistor of 250 Ω between terminals 6 and 8 is available, which may be used as the HART communication resistor.


Sockets for the connection of a HART communicator are integrated into the terminals of the device.

**Assembly**

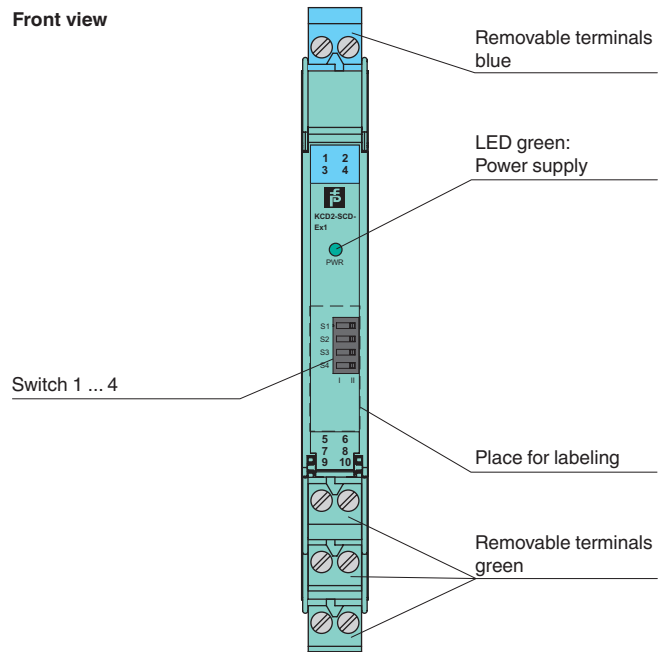

**SIL 2**

**Connection**

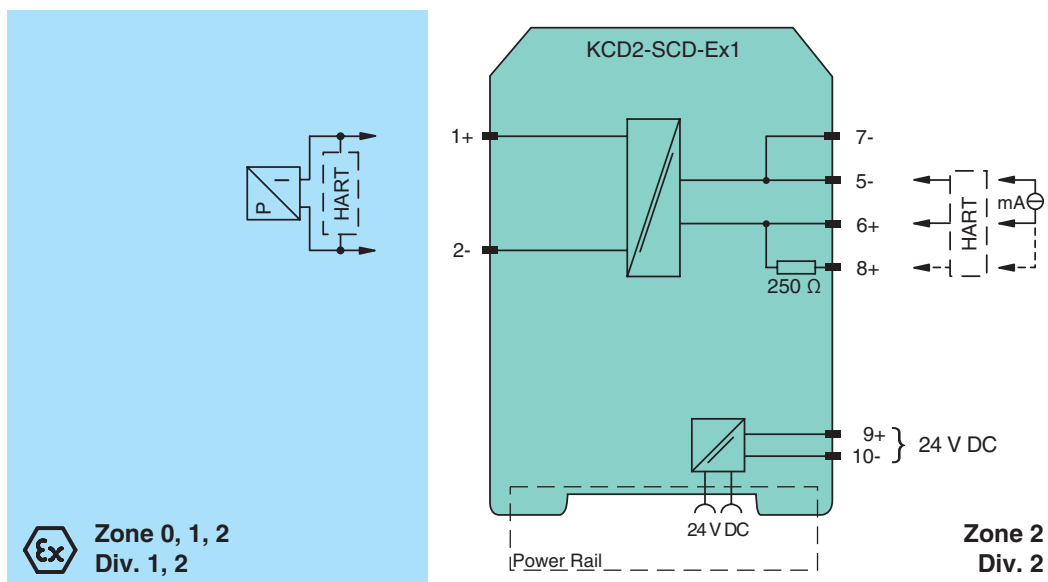

Release date 2018-11-05 15:24 Date of issue 2018-11-05 232717\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com


Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>General specifications</b>		
Signal type		Analog output
<b>Functional safety related parameters</b>		
Safety Integrity Level (SIL)		SIL 2
<b>Supply</b>		
Connection		Power Rail or terminals 9+, 10-
Rated voltage	$U_r$	19 ... 30 V DC
Ripple		≤ 10 %
Rated current	$I_r$	≤ 30 mA
Power dissipation		≤ 600 mW
Power consumption		≤ 700 mW
<b>Input</b>		
Connection side		control side
Connection		terminals 5-, 6+
Input signal		4 ... 20 mA limited to approx. 30 mA
Input voltage		depending on switch configuration open loop voltage of the control system < 23 V open loop voltage of the control system < 27 V
Voltage drop		depending on switch configuration open loop voltage of the control system < 23 V: approx. 6 V at 20 mA open loop voltage of the control system < 27 V: approx. 10 V at 20 mA
Input resistance		> 100 kΩ, with field wiring open
<b>Output</b>		
Connection side		field side
Connection		terminals 1+, 2-
Current		4 ... 20 mA
Load		0 ... 650 Ω
Voltage		≥ 13 V at 20 mA
Ripple		20 mV <sub>rms</sub>
<b>Transfer characteristics</b>		
Accuracy		0.1 %
Deviation		at 20 °C (68 °F), 0/4 ... 20 mA ≤ ± 0.1 % incl. non-linearity and hysteresis
Influence of ambient temperature		< 2 μA/K (0 ... 60 °C (32 ... 140 °F)); < 4 μA/K (-20 ... 0 °C (-4 ... 32 °F))
Frequency range		field side into the control side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 3 kHz (-3 dB)
Rise time		10 to 90 % ≤ 100 ms
<b>Galvanic isolation</b>		
Input/Output		reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub>
Input/power supply		reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub>
Output/power supply		reinforced insulation acc. to EN 50178, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>		
Display elements		LED
Control elements		DIP-switch
Configuration		via DIP switches
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		NE 21
Degree of protection		IEC 60529
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		12.5 x 114 x 124 mm (0.5 x 4.5 x 4.9 inch) , housing type A2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate		CESI 06 ATEX 021
Marking		⊕ II (1)G [Ex ia Ga] IIC , ⊕ II (1)D [Ex ia Da] IIIC , ⊕ I (M1) [Ex ia Ma] I
Output		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
Supply		


Release date 2018-11-05 15:24 Date of issue 2018-11-05 232717\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Maximum safe voltage	$U_m$	250 V AC (Attention! $U_m$ is no rated voltage.)
Equipment		terminals 1+, 2-
Voltage	$U_o$	25.2 V
Current	$I_o$	100 mA
Power	$P_o$	630 mW
Certificate		PF 06 CERT 0973 X
Marking		 II 3G Ex nA IIC T4 Gc
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Output/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 50303:2000 , EN 60079-15:2010
<b>International approvals</b>		
FM approval		
Control drawing		116-0419 (cFMus)
UL approval		
Control drawing		116-0420 (cULus)
IECEX approval		IECEX CES 06.0001
Approved for		[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I
<b>General information</b>		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
<b>Accessories</b>		
Optional accessories		- power feed module KFD2-EB2(.R4A.B)(.SP) - universal power rail UPR-03(-M)(-S) - profile rail K-DUCT-BU(-UPR-03)

Release date 2018-11-05 15:24 Date of issue 2018-11-05 232717\_eng.xml

**Configuration**

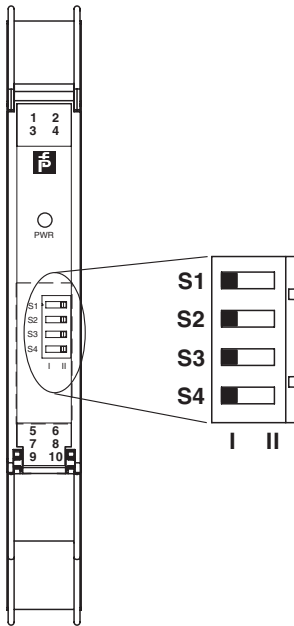

**Switch position**

Function	S1	S2	S3	S4
Open loop voltage of the control system < 23 V	I	I	II	II
Open loop voltage of the control system < 27 V	II	I	II	II

Factory settings: open loop voltage of the control system < 23 V