






STORMACAXIAL FAN 120x120x38mm Series



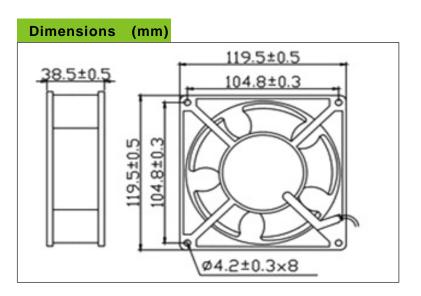


CONSTRUCTION:

*Die-cast aluminum housing *Glass fiber reinforced plastic: Impeller are UL94-0 rating *Impedance portected *leader wire or terminal is available

OPERATING TEMPERATURE:

*Ball bearing -30℃ to + 75℃ *Sleeve bearing -10℃ to + 70℃

Performance Ccurve



Spec	RATED (VDC)	FREQ. (Hz)	CURRT (Amp)	POWER (Watts)	SPEED (Rpm)	AIR FLOW (CFM)	PRESSURE (In H2O)	NOISE (dB-A)	Weight (g)
SA12038HB-11K	100/120	50/60	0.25/0.19	18/13	2550/2900	89/115	0.30/0.35	45/51	520
SA12038HB-22K	200/240	50/60	0.12/0.11	16/13	2550/2900	89/115	0.30/0.35	45/51	520