



斯托姆科技

Full Metal AXIL


TUV
CERT
ISO 9001:2000
ISO 14001:2004
ISO/TS16949:2002



STORM AC Full Metal AXIL FAN 120X120X38 Series



Dimensions (mm)

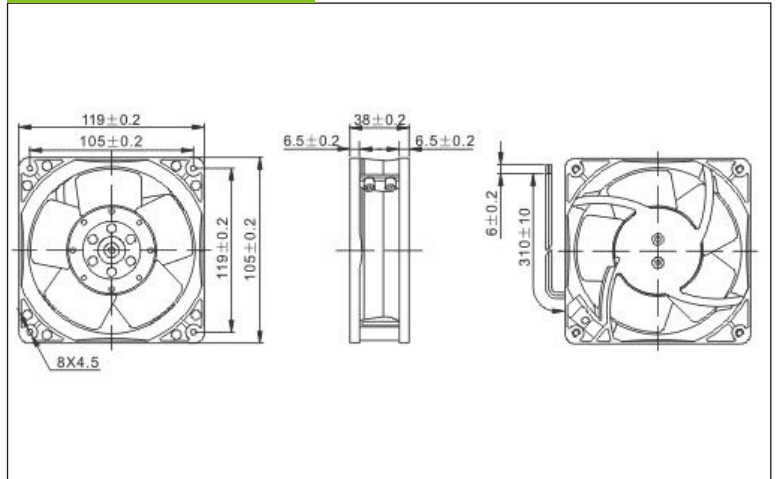


CONSTRUCTION:

- Die-cast cast aluminum housing
- Metal impeller or
- Glass fiber reinforced plastic:
- Impeller are UL 94V-0 rating
- Shaded pole motor/Impedance protected
- Leader wire or terminal is available

OPERATING TEMPERATURE:

- Ball bearing -30°C to +75°C
- Sleeve bearing -10°C to +70°C

Performance Ccurve

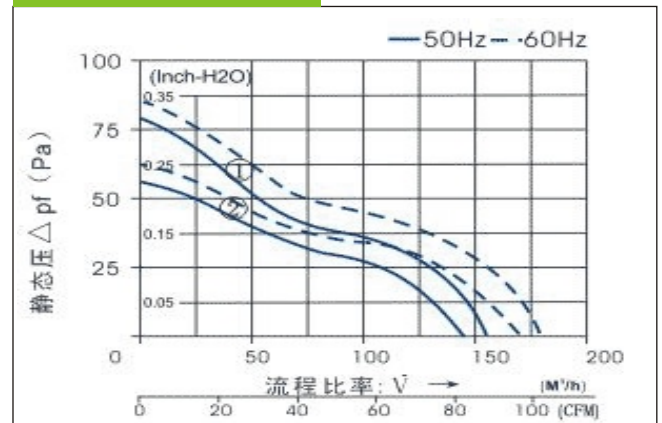

Model	Spec	RATED (VDC)	FREQ. (Hz)	CURRT (Amp)	POWER (Watts)	SPEED (Rpm)	AIR FLOW (CFM)	PRESSURE (In H ₂ O)	NOISE (dB-A)	Weight (g)	Curve
SA12038HB-11F		100/120	50/60	0.27/0.28	22/23	2500/3000	85/100	2.16/2.36	44/45	540	①
SA12038HB-22F		200/240	50/60	0.15/0.18	24/27	2600/3100	95/105	2.16/2.36	45/50	540	②