




斯托姆科技

AXIAL

TÜV
CERT
ISO 9001:2000
ISO 14001:2004
ISO/TS16949:2002



STORM DC AXIAL FAN 120x120x38mm Series

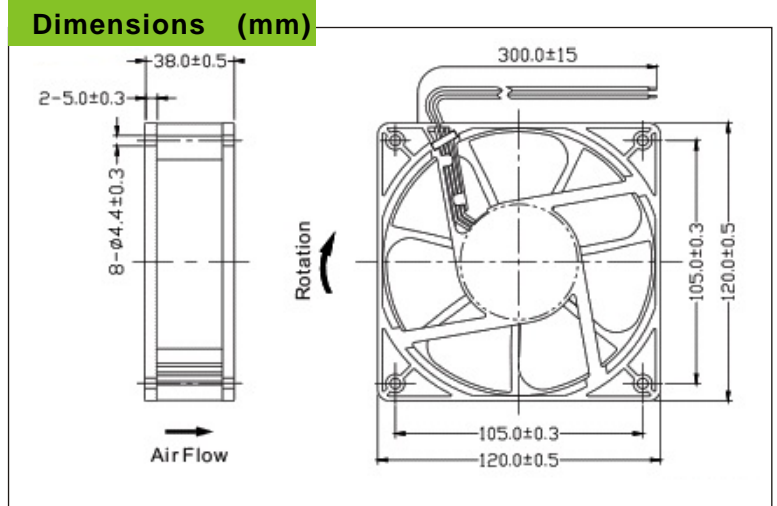

CONSTRUCTION

Glass fiber reinforced plastic:
 Impeller and housing PBT are UL 94V-0 rating

OPERATING TEMPERATURE:

Ball bearing -30°C to +75°C
 Sleeve bearing -10°C to +70°C

INSULATION RESISTANCE:

10meg Ohm min. at 500 VDC
 (between frame and terminal)


DIELECTRIC STRENGTH:

5mA max. at 500 VAC 60Hz one minute
 (between frame and terminal)

FUNCTION:

Auto-restart option
 Frequency generator or rotation detection signal option

Performance Curve

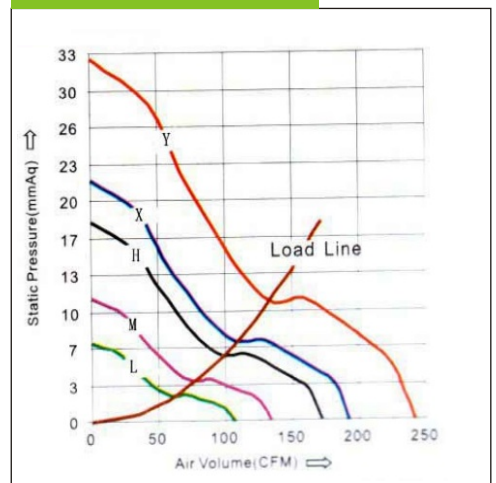

Model	Spec	RATED (VDC)	RANGE (VDC)	CURRENT (Amp.)	POWER (Watts)	SPEED (Rpm)	AIR FLOW (Q)		PRESSURE (P)		NOISE (dBA)	Weight (g)
							(m3/min)	(CFM)	(mmAq)	(In H ₂ O)		
SA12038HB-5G		05	04-06	1.568	7.84	3250	3.694	130.45	11.14	0.439	46.13	313g
SA12038MB-5G	1.187			5.93	2900	3.263	115.24	8.81	0.347	42.96		
SA12038LB-5G	0.801			4.00	2600	2.958	104.46	7.26	0.286	39.83		
SA12038ZB-1G		12	07-14	2.050	24.60	5800	5.947	210.00	25.72	1.013	61.89	313g
SA12038YB-1G	1.625			19.50	4700	5.239	185.00	21.80	0.858	57.78		
SA12038XB-1G	1.191			14.29	4200	4.748	167.66	17.92	0.706	52.99		
SA12038HB-1G	0.837			10.05	3750	4.268	150.71	15.17	0.597	50.32		
SA12038MB-1G	0.398			4.77	2900	3.263	115.24	8.81	0.347	42.96		
SA12038LB-1G	0.292			3.55	2600	2.958	104.46	7.26	0.286	39.83		
SA12038ZB-2G		24	15-27	1.472	35.33	5800	6.513	230.00	32.90	1.295	65.02	313g
SA12038YB-2G	0.800			19.20	4700	5.239	185.00	21.80	0.858	57.78		
SA12038XB-2G	0.578			12.53	4200	4.748	167.66	17.92	0.706	52.99		
SA12038HB-2G	0.387			9.28	3750	4.268	150.71	15.17	0.597	50.32		
SA12038MB-2G	0.175			4.20	2900	3.263	115.24	8.81	0.347	46.13		
SA12038LB-2G	0.126			3.03	26000	2.958	104.46	7.26	0.286	39.83		
SA12038ZB-4G		48	30-57	0.685	32.88	5800	6.513	230.00	32.90	1.295	65.02	313g
SA12038YB-4G	0.381			18.29	4700	5.239	185.00	21.80	0.858	57.78		
SA12038XB-4G	0.311			12.96	4200	4.748	167.66	17.92	0.706	52.99		
SA12038HB-4G	0.200			9.62	3750	4.268	150.71	15.17	0.597	50.32		
SA12038MB-4G	0.100			4.79	2900	3.263	115.24	8.81	0.347	42.96		
SA12038LB-4G	0.074			3.54	2600	2.958	104.46	7.26	0.286	39.83		