

微電腦型6組類比輸入盤面式電錶 (MICROPROCESS 6 CHANNEL ANALOG INPUT PANEL METER)

MODEL
MM8A



特點(FEATURES)

精確度0.05%滿刻度±1位數(Accuracy 0.05% F.S.±1digit)
可同時量測與顯示六組直流電壓/電流/Pt-100/熱電偶等信號...
(Measuring six channel DCA/DCV/Pt-100/Thermocouple/etc...)
顯示範圍-1999-9999可任意規劃(Programmable rate -1999 to 9999 digit)
輸入組數(1至6)可任意規劃(Input channel number(1-6) can be modified)
數位RS-485界面(Digit Rs-485 interface function)(optional)


1.MODEL:MM8A- (選購型號)

NO	Input Type (Input range)	NO	Input Type (Input range)	NO	RS-485	NO	Aux.Power
A	DCV:0~±500mV/±1V/±2V/±5V/±10V	D	DCV:0~±25mV/±50mV/±100mV/±500mV/±1V Thermocouple:J(-200~760)/K(-200~1360) T(-200~395)/E(-185~990)/R(0~1760) S(0~1760)/B(200~1800)	N	None	A	AC/DC18~60V
B	DCA:0~±20mA			Y	RS-485	B	AC/DC90~260V
C	Pt-100(DIN):-200.0~+850.0)			Modbus mode		Less 3VA for AC/DC input	

2.SPECIFICATION (主要規格)

Measuring accuracy (精確度) (23 ±5)	: 0.05% F.S.±1 digit(mV,V,mA) 0.1% F.S.±1 digit(Pt-100) 0.2% F.S.±0.5 (CJC)(Thermocouple)
Cold junction compensation (冷接點補償)	: <±0.5 (0~70)
Readout range (顯示值範圍)	: -1999~9999 digit adjustable
Over input indication (過載顯示)	: " doFL " or " -doFL "
Polarity display (極性顯示)	: When input is negative " _ " display
Zero (offset) range (歸零調整範圍)	: 0~±999 digit adjustable (individuality channel)
Span (scale) range (最大值調整範圍)	: 0~±999 digit adjustable (individuality channel)
Sampling time (取樣時間)	: 1 cycles/sec.(total)
RS-485 address (通訊位址)	: "01"~"FF"(0~255)
RS-485 baud rate (傳輸速度)	: 38400/19200/9600/4800/2400 selective
RS-485 protocol (通信協議)	: Modbus RTU mode
Display (顯示幕)	: Red high efficiency LEDs high 7mm(0.28")
Temp. coefficient (溫度係數)	: 50ppm/ (0~50)
Parameter setting (參數設定方式)	: Touch switches
Memory mode (記憶型式)	: Non-volatile E ² PROM memory
Dielectric strength (絕緣耐壓能力)	: 2KVac/1 min. (input/power)
Operating condition (使用環境條件)	: 0-50 (20 to 90% RH non-condensed)
Storage condition (存放環境條件)	: 0-70 (20 to 90% RH non-condensed)
CE EMC Certification (CE認證)	: EN 55022:1998/A1:2000 Class A EN 61000-3-2:2000 EN 61000-3-3:1995/A1:2001 EN 55024:1998/A1:2001

3.OUTSIDE DIMENSION AND CONNECTION DIAGRAM (外型尺寸與開孔尺寸與配線圖)

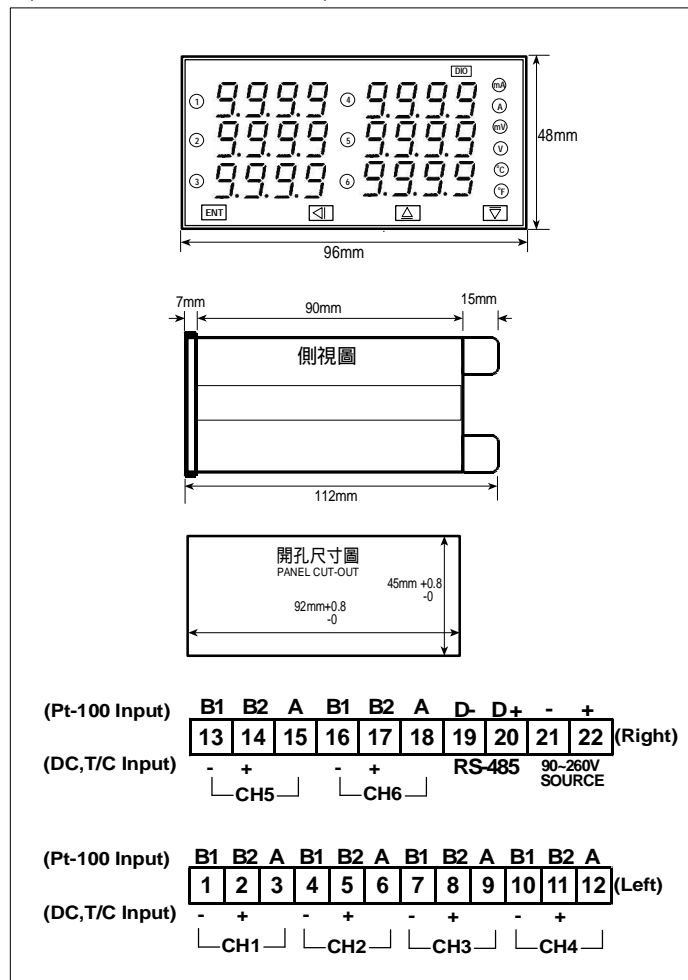

<http://www.gotojs.com>

0512-67574144