

3 位數盤面式交直流電壓錶 (無電源式) (24X48mm) (SELF-POWERED, 3 DIGIT AC/DC VOLTAGE MONITORS, 24x48mm)

MODEL
MMS-LDAC



特點(FEATURES)

精確度0.1%滿刻度 ± 1位數(Accuracy 0.1% F.S. ± 1digit)
可直接量測交直流電壓(AC/DC 20~265V)無需另接電源
(Self-power, AC/DC line voltage monitors (AC/DC20~265V))
精密濾波整流, 均方根值校正(Full-wave averaging, RMS calibrated)
尺寸小(24x48x50mm), 穩定性高(Dimension small (24x48x50mm) and High stability)
分離式端子, 配線容易(Discrote terminal, connector easy)
CE 認證(CE EMC certification)


1.MODEL:MMS-LDAC

(選購型號)

2.SPECIFICATION (主要規格)

Measuring accuracy : 0.1% F.S. ± 1 digit(DC)
(精確度) (23 ± 5) 0.2% F.S. ± 1 digit(AC)
Input voltage range : AC/DC 20~265Vrms
(電壓輸入範圍)
Over voltage protection : Maximun AC/DC 300Vrms
(過電壓保護)
Input frequency range : 45~400Hz(AC voltage input)
(電壓頻率輸入範圍)
Current consumption : 30mArms (max.)
(消耗電流)
Sampling time : 2.5 cycles/sec.
(取樣時間)
Measurement type : Full-wave average, RMS calibrated for
(量測型式) AC sinusoidal input
Display : Red high efficiency LEDs high 10.16mm(.4")
(顯示幕)
Polarity display : None
(極性顯示)
Temp. coefficient : 50ppm/ (0-50)
(溫度係數)
Outside dimension : 24x48x50mm
(外型尺寸)
Weight : 50g
(重量)
Case material : ABS
(外殼材料)
Dielectric strength : 2KVac/1 min. (input/case)
(絕緣耐壓能力)
Impulse test : ANSI C37.90a/1974, DIN-IEC 255-4
(衝擊測試) impulse voltage 4KV (1.2 x 50us)
Operating condition : 0-50 (20 to 90% RH non-condensed)
(使用環境條件)
Storage condition : 0-70 (20 to 90% RH non-condensed)
(存放環境條件)
CE EMC Certification : EN 55022:1998/A1:2000 Class A
(CE 認證) EN 61000-3-2:2000
EN 61000-3-3:1995/A1:2001
EN 55024:1998/A1:2001

3.OUTSIDE DIMENSION AND CONNECTION DIAGRAM (外型尺寸與開孔尺寸與配線圖)

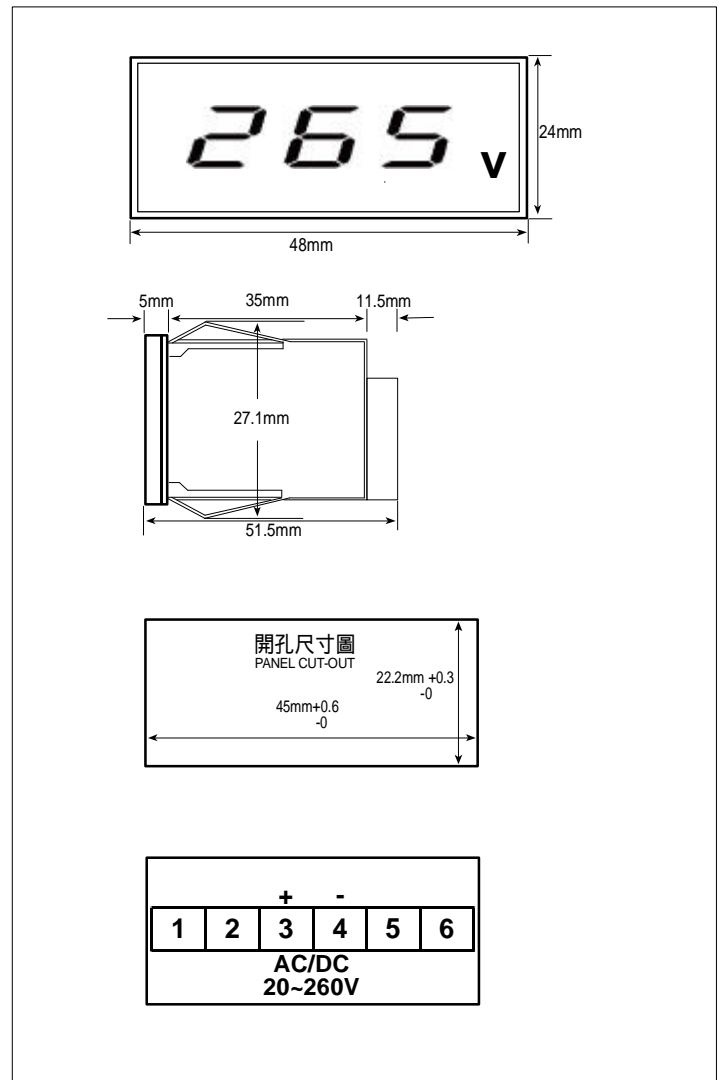

<http://www.gotojs.com>

0512-67574144