



Load direction
加载方向



Wiring Diagram/接线图

Capacity/量程(N)	H1	H2	D1	D2	D3	C	M
50~500	14.5	16	25	19	5	10	M4
1K~10K	14	16	32	24.5	8	16	M5
20K~50K	14	16	38	30	11	20	M6
60K~120K	22	25	51	41	15	30	M8

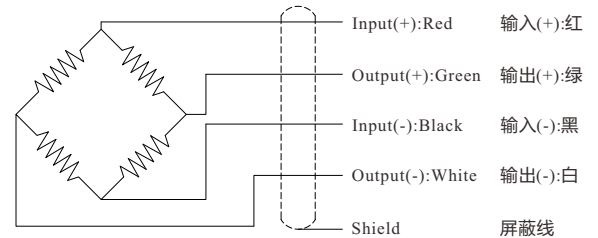

--- Specifications / 规格参数 ---

Capacity/量程	0.1/0.2/0.3/0.5/1/1.2/2/3/5/10/12/20/30/50/60/100/120KN		
Rated Output 额定输出	1.5~2.0mV/V	Compensated Temp. 温度补偿范围	-10...+60°C
Excitation 激励电压	5~15V	Operating Temp. 工作温度范围	-20...+80°C
Zero Balance 零点输出	±2% of R.O.	Temp. Shift Zero 零点温度漂移	±0.05% of R.O./10°C
Nonlinearity 非线性	±0.2% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.05% of R.O./10°C
Hysteresis 滞后	±0.2% of R.O.	Input Resistance 输入阻抗	385±30Ω
Nonrepeatability 非重复性	±0.1% of R.O.	Output Resistance 输出阻抗	350±3Ω
Creep(30min) 蠕变	±0.1% of R.O.	Insulation Resistance 绝缘阻抗	>5000MΩ(50V)
Safe Overload 安全过载	150% of F.S.	Ingress Protection 防护等级	IP65
Ultimate Overload 极限过载	200% of F.S.	Material of Element 弹性体材料	Stainless steel 不锈钢
Cable 导线	Ø4*1000mm 4-core shielded cable Ø4*1000mm 4芯屏蔽线		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知