


NESB-AE21 (単相乾式変圧器 B種絶縁)

1次電圧:180,R200,220 V
2次電圧:R100,110 V

JEM1333準拠

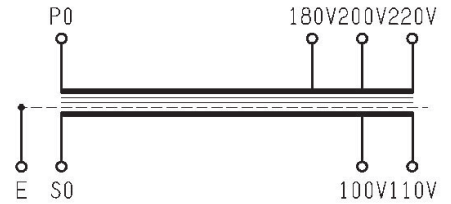

国内規格品

容量 (VA)	型式	L	LP	W	WP	H	取付け穴 (A×B)	端子台 (P / S / E)	質量 (Kg)	形状	標準ケース
30	NESB30AE21	88(76)	56	95	75	100	5×10 Ucut	TEV158	1.1	①	No.1
○ 50	NESB50AE21	88(76)	56	95	75	100					
75	NESB75AE21	88(76)	56	105	85	100					
○ 100	NESB100AE21	88(85.5)	66	105	83	110					
150	NESB150AE21	88(85.5)	66	115	95	110					
○ 200	NESB200AE21	96	76	125	100	115					
250	NESB250AE21	105	82	125	98	125					
○ 300	NESB300AE21	105	82	135	108	125	7×14 Ucut		3.2		
400	NESB400AE21	114	90	145	112	130					
○ 500	NESB500AE21	133	110	140	109	150					
600	NESB600AE21	133	110	145	114	150					
○ 750	NESB750AE21	133	110	165	134	150					
○ 1k	NESB1000AE21	171	140	150	115	190					
○ 1.5k	NESB1500AE21	171	140	180	140	190					
○ 2k	NESB2000AE21	200	160	175	145	270	8×16 Ucut	TEV308	3.8		No.2
○ 3k	NESB3000AE21	200	160	215	180	270					
4k	NESB4000AE21	200	160	245	200	280					
5k	NESB5000AE21	250	200	230	160	335	10×20 Ucut	TX30/TX30/TX30	4.4	②	No.3
○ 4k	NESB4000AE21	200	160	245	200	280					
○ 5k	NESB5000AE21	250	200	230	160	335					
6k	NESB6000AE21	250	200	265	185	340					
7.5k	NESB7500AE21	250	200	285	205	340					
10k	NESB010AE21	310	125	310	186	385	13φ×18	TX60/TX100/TX60	51	③	No.4
								70	No.5		

※ ○印は、標準在庫品です。

端子台	ビス径	定格電圧/定格電流	最大適合電線	締付けトルク
TEV158	M3	600V/20A	2 m ²	0.6~0.9 N·m
TEV308	M4	600V/40A	5.5 m ²	1.4~1.8 N·m
TX30	M5	600V/50A	8 m ²	2.2~2.8 N·m
TX60	M6	600V/90A	22 m ²	4~5 N·m
TX100	M8	600V/130A	38 m ²	8~19 N·m

※ 端子台を使用する場合、圧着端子を併用して下さい。

