
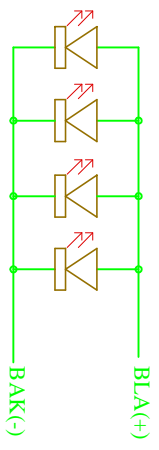
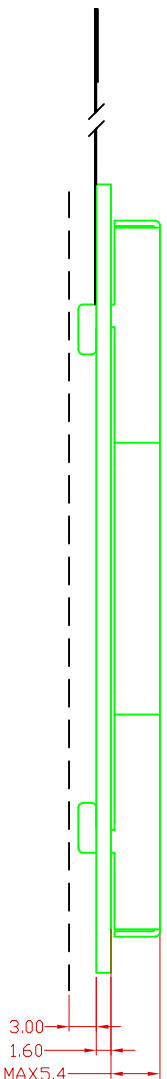



PIN	SYMBOL
1	VSS
2	VDD
3	NC
4	AO
5	/WR
6	/RD
7	D0
8	D1
9	D2
10	D3
11	D4
12	D5
13	D6
14	D7
15	/CS
16	/RST
17	BLA(+)
18	BAK(-)

PIN	SYMBOL
1	VSS
2	VDD
3	D0
4	D1
5	D2
6	D3
7	D4
8	D5
9	D6
10	D7
11	/WR
12	AO
13	/RD
14	/RST
15	/CS
16	NC
17	BAK(-)
18	BLA(+)
19	G-CS
20	G-SO
21	G-SI
22	G-SCLK



Specification:

- 1). Driving: Duty: 1/160, Bias:1/12, VLCD:18.0, VDD:3.3V
- 2). Viewing angle: 6 0'clock
- 3). Display mode: FSTN/Positive/Transflective
- 4). Operating temp.: -10°C~+60°C
Storage temp.: -20°C~+70°C
- 5). IC: ST7529
- 6). Backlight: White LED (IF=45~60mA)

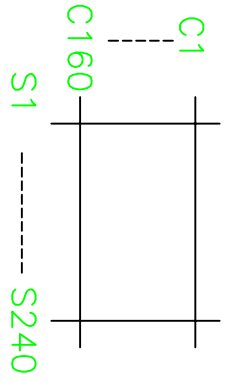

Dwg Title		HTM240160F-31W-N3P	
Dwg No.		Date	
Scale		Unit	
Drawn		Checked	
ny		Approved	
		2010-9-25	
		mm	
		F0.2	