
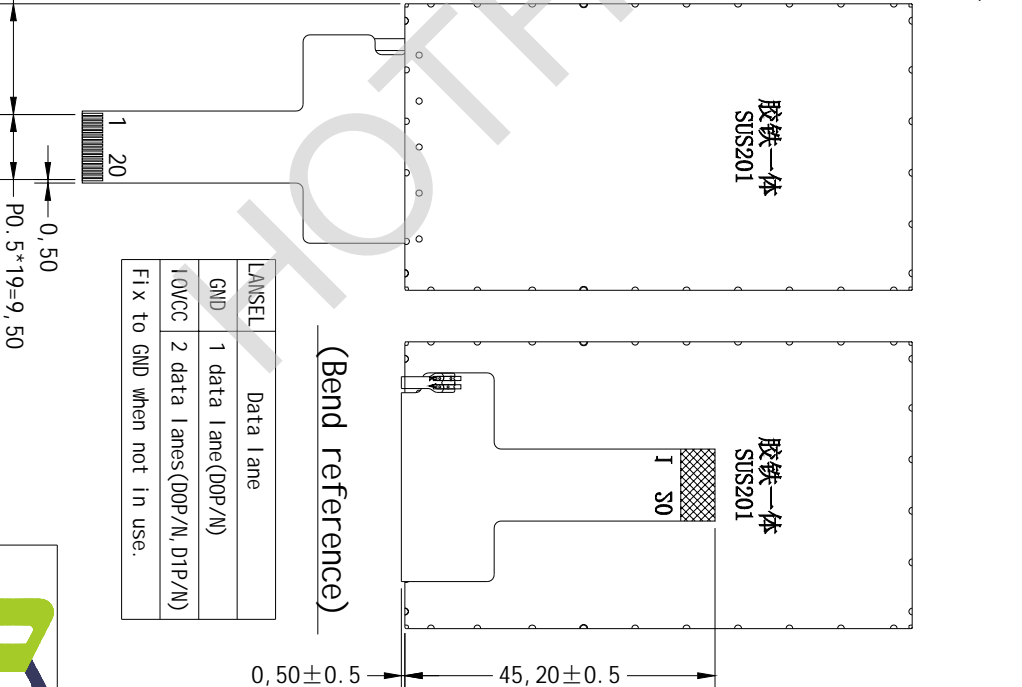


*** Do not display the fixed pattern for a long time when using a normally black panel, as it may cause image sticking due to the LCM structure. If the screen is displayed in fixed mode, use a screen saver. It is recommended to display the fixed mode in less than 2 minutes or less.


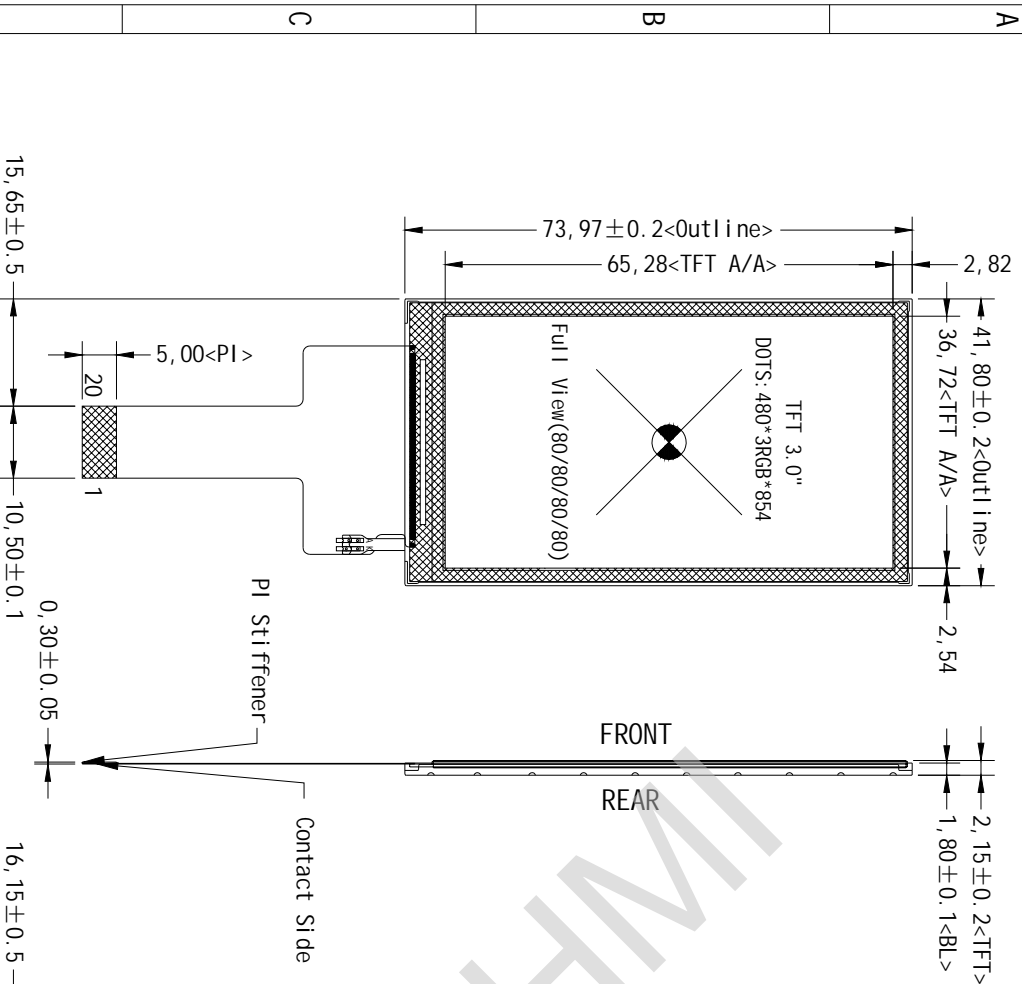


LANSEL	Data Lane
GND	1 data Lane (D0P/N)
IOVCC	2 data Lanes (D0P/N, D1P/N)

Fix to GND when not in use.

Pin_SIGNAL	Pin_SIGNAL
1	NC
2	LED_K
3	NC
4	LED_A
5	LANSEL
6	VCI
7	IOVCC
8	NC
9	RESX
10	GND
11	D1P
12	D1N
13	GND
14	DCKP
15	DCKN
16	GND
17	D0P
18	D0N
19	GND
20	GND

D	
*1. LCD Display Type	TFT/Transmissive/Normally Black/16.7M Color
*2. Viewing Direction	Full View(0/90/180)
*3. Interface	Video MIPI 1L/2L
*4. Operating Voltage	IOVCC=1.8V, VCI=2.8V (Typ)
*5. Operating Temp	-30° C-85° C

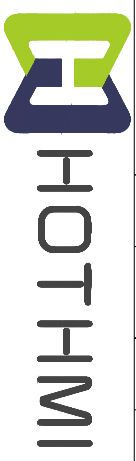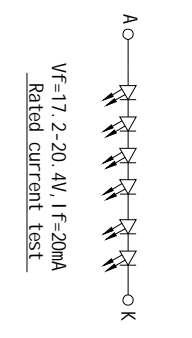

D	
Scale	1:1
Unit	MM
Tolerance	±0.3
Ver.	V0
Drawn	Liu.YL
Date	2021-04-25

Hot Title: TFT-H030A2FWI ST2N20