



\*\*\* Do not display the fixed pattern for a long time when using a normally black panel, as it may cause image sticking due to the LCM structure. If the screen is displayed in fixed mode, use a screen saver. It is recommended to display the fixed mode in less than 2 minutes or less.

Modify1: 背光厚度减薄0.70MM  
 Modify2: TFT+CTP总厚度减薄0.50MM

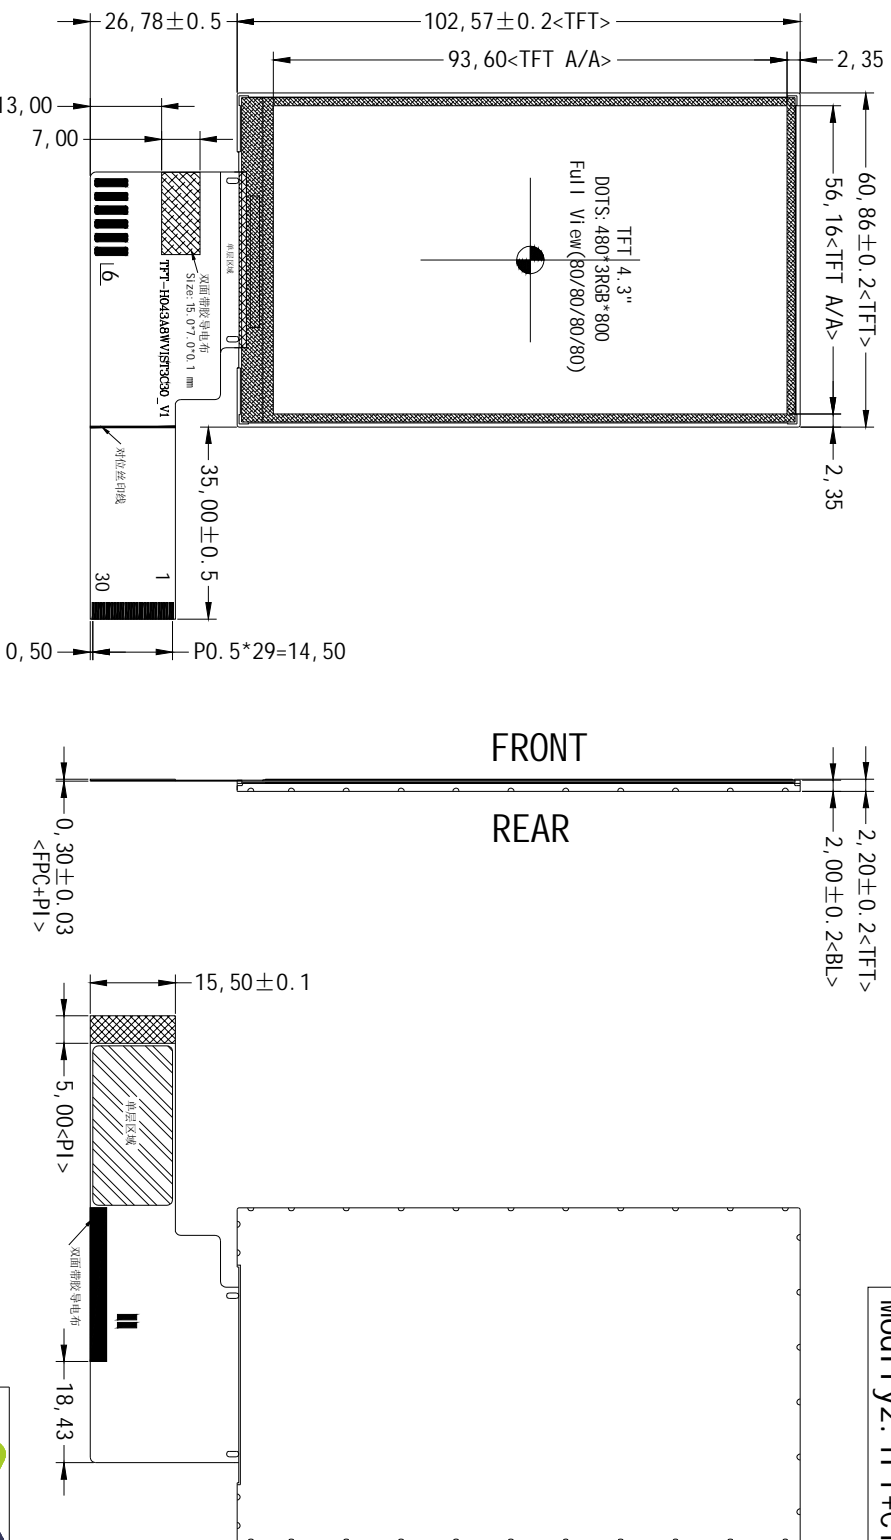

PIN_SIGNAL	PIN_SIGNAL
1	NC
2	LED_K
3	NC
4	LED_A
5	NC
6	VCI
7	IOVCC
8	NC
9	RESX
10	GND
11	D1P
12	D1N
13	GND
14	DCKP
15	DCKN
16	GND
17	DOP
18	DON
19	GND
20	GND
21	NC
22	NC
23	GND
24	NC
25	CTP_VDD
26	CTP_SCL
27	CTP_SDA
28	CTP_INT
29	CTP_RES
30	GND

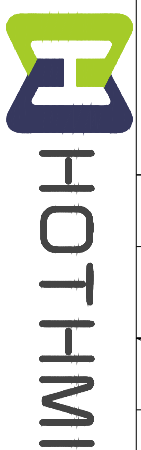

Part Title: TFT-H043A8WV1ST4N30

Scale: 1:1 Unit: MM Tol: ±0.3

Ver: V1 Drawn: Liu.YL Date: 2021-01-05

*1. LCD Display Type	TFT, Transmissive, Normally Black	*6. Storage Temp	-20° C~70° C
*2. Viewing Direction	Full View(80/80/80/80/L80)	*7. Driver IC	ST7701S<TFT>
*3. Interface	Video MIPI 2L	*8. Backlight	WHITE VF=15.5V IF=40mA(TYP)
*4. Operating Voltage	IOVCC=1.8V, VCI=3.3V<TFT>	*9. LCM Brightness	450 cd/m² (Typ)
*5. Operating Temp	-0° C~50° C		

