



*** Do not display the fixed pattern for a long time when using a normally black panel, as it may cause image sticking due to the LCM structure. If the screen is displayed in fixed mode, use a screen saver. It is recommended to display the fixed mode in less than 2 minutes or less.

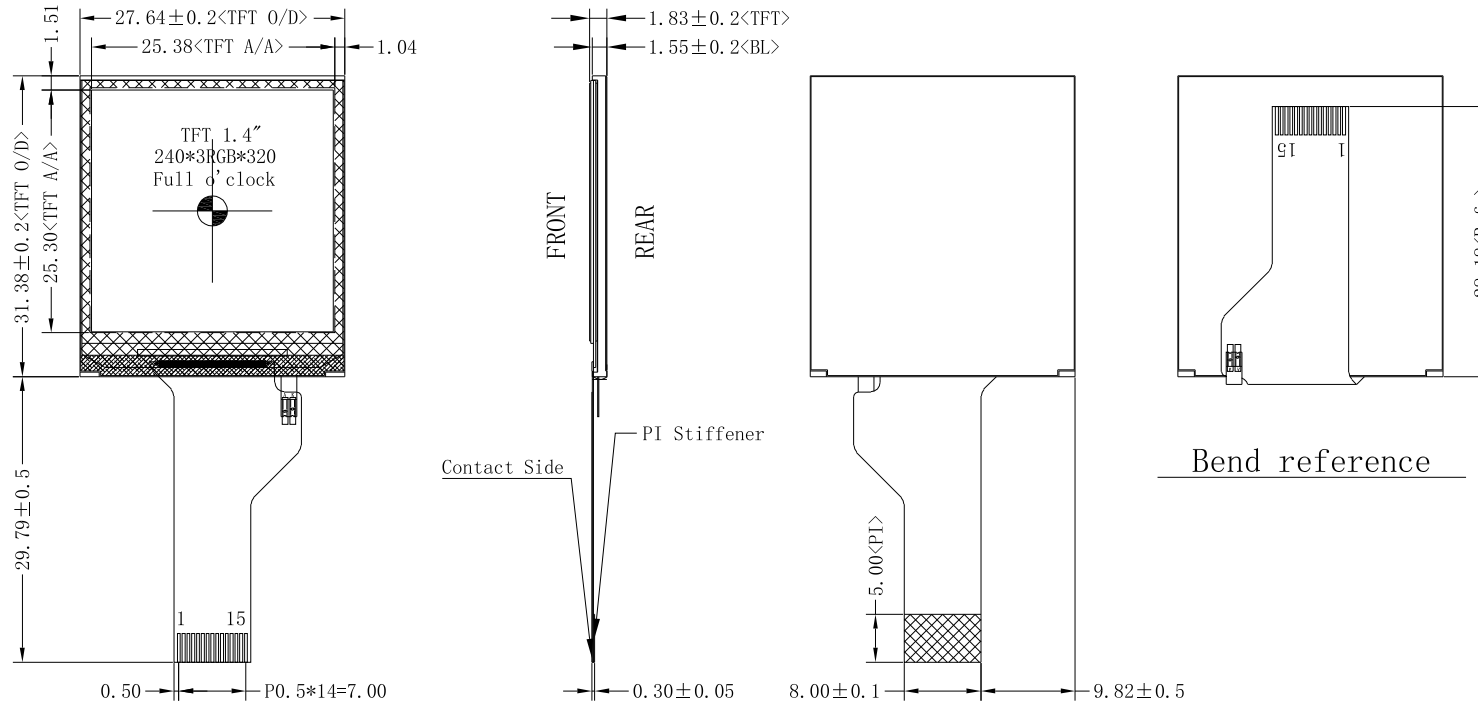

PIN	SIGNAL	PIN	SIGNAL
1	LEDK		
2	NC		
3	NC		
4	NC		
5	NC		
6	LEDA		
7	VCI		
8	GND		
9	GND		
10	SDA		
11	SCL		
12	CS		
13	RS/A0		
14	RESX		
15	NC		

*1. LCD Display Type	TFT, Transmissive, 262K color, Normally Black		
*2. Viewing Direction	Full O' Clock (U80/D80/L80/R80)	*6. Storage Temp	-30° C~85° C
*3. Interface	SPI 4-line 8bit serial	*7. Driver IC	ST7789V
*4. Operating Voltage	VCI=2.8V, IOVCC=1.8V(Typ)	*8. Backlight	3 white LEDs in parallel
*5. Operating Temp	-30° C~85° C	*9. LCM Brightness	550 cd/m ² (Typ)



HOTHMI

Dwg Title: TFT-H014B2QDIST5N15

Scale: 1:1 Unit: mm Tol: ±0.3

Ver: V0 Drawn: Liu Date: 2020-11-03