


PIN	SYMBOL	PIN	SYMBOL
1	VSS	10	D2
2	A0	11	D3
3	/WR	12	D4
4	/RD	13	D5
5	/CS	14	D6
6	/RST	15	D7
7	VDD	16	K
8	D0	17	NC
9	D1	18	A

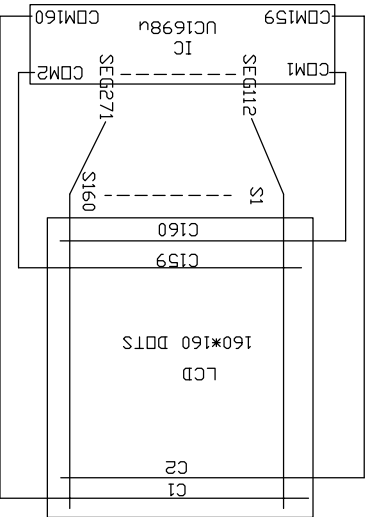

Wiring Details
(Top View)
Scale=free

HOT DISPLAY


Dwg Title
HTM160160C Outline Dwg

Dwg No. 1005131803 Date 2010-05-13

Scale Unit Tol. ±0.5

Drawn Checked Approved
HY

- Note:
- *1. LCD Display Type : FSTN, Positive, Transflective
 - *2. Viewing Direction : 9H
 - *3. Duty : 1/160, Bias : 1/10
 - *4. Operating Voltage : 3.0V, Vlcd = 15.0V
 - *5. Operating Temperature : -20°C~70°C
 - *6. Storage Temperature : -30°C~80°C
 - *7. Control/Drive IC : UC1698u

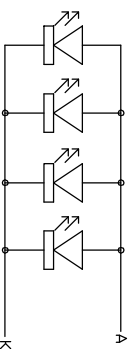

Backlight Circuit
Scale=free